



| 2 |  
| voice |

VIDEO ENTRY SYSTEM



7" SOFT TOUCH VIDEO INTERCOM  
MOD.1719/1

- Wall mount
- 1 physical button for sound activation/deactivation
- 4 soft touch buttons
- 2 Yokis radio channels
- ILA Hearing Assistive Aid



**modo****7" SOFT TOUCH  
VIDEO INTERCOM****MOD.1719/1**

## Main features:

- Wall mount
- Soft touch buttons for:
  - door opener
  - gate opener
  - mute
  - programmable accessory function
- 2 Yokis radio channels
- 2 relay outputs for additional services (activated simultaneously with radio control)
- MUTE mode (standard or timed for 8 hours)
- Possibility of 2 intercom calls
- OSD menu for brightness and contrast adjustments, selection of 16:9/4:3 image format
- Floor call input
- Output for automatic recall
- 5 selectable call tones
- Call volume regulation
- Hands free or "push to talk" mode

## Technical data

- Display resolution: 800 x 480
- Operating temperature: -5° +45°
- Dimensions: 202 x 142 x 23 mm

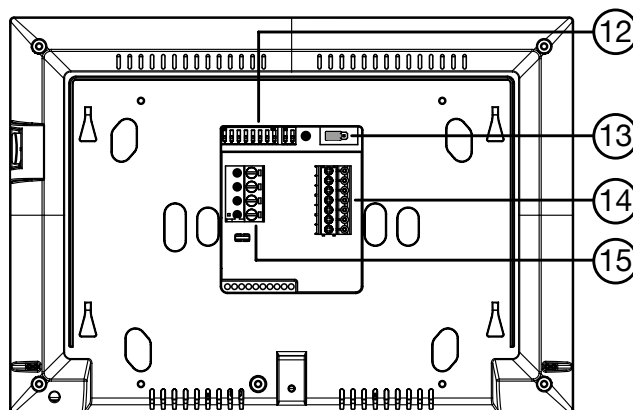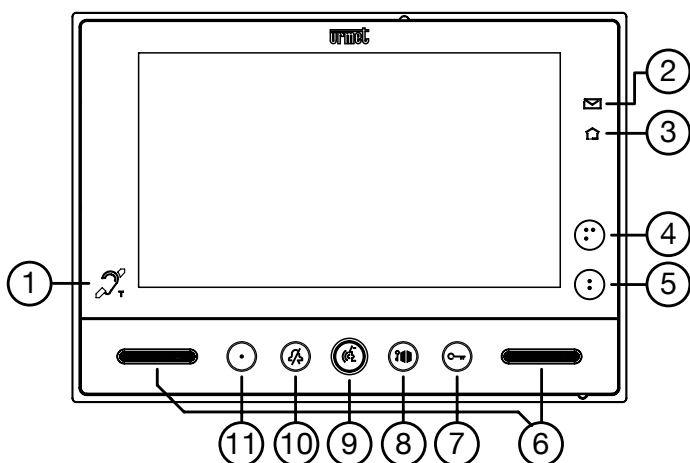

## COMPONENT DESCRIPTION:

- Icon indicating that the video intercom features hearing assistive aid (ILA)
- Green LED signalling the presence of mail in the letterbox (LETTERBOX function)
- Blue LED confirming Yokis command transmission
- Button for:
  - sending activation/deactivation command for channel 2 of the built-in Yokis transmitter
  - and closing, at the same time, the contact between terminals C, Y2 (max. 50 mA @ 24 Vdc)
- Button for:
  - sending activation/deactivation command for channel 1 of the built-in Yokis transmitter
  - and closing, at the same time, the contact between terminals C, Y1 (max. 50 mA @ 24 Vdc)
- Loudspeakers
- Door opening button (with backlighting green LED)
- Gate opening button (with backlighting green LED)
- Sound activation/deactivation button (with backlighting green LED)
- "MUTE" button (with backlighting red LED)
- Button (with backlighting green LED) configurable for calling the switchboard (default), automatic activation, or intercom call
- Configuration dip-switch
- Jumper for video terminal
- Terminal box "A"
- Terminal box "B"