

ACCESSORIES AND OPTIONS Selection




ENTRY PANELS

INSTALLATION ACCESSORIES




- Embedded box.
- Surface mount box including rain hood
- Rain hood


IPASSAN




4 door base controller



2 door expansion card (door 5-6)




10 input base module




12 input expansion card



metal enclosure



10 output base module



12 output expansion card

IPASSAN OPTIONS



FD-500-570 2VOICE INTERFACE FOR URMET PANELS



No need for this interface if you use our 2-SMART panel. On the other hand, to manage an URMET 2VOICE panel, with our IPASSAN access control system, you have to use our 2VOICE interface to take advantage of a maximum of functionalities.

- Event logging (door calls, door opening from the apartment, lift management)
- Increased security through remote relay
- Lift management by IPASSAN for visitors and resident
- And more...


FDI MATELEC

SECURITY EXPERTISE

Since 1989 FDI has been a designer and manufacturer of innovative access control systems.

The company manages all projects from design to production. FDI is involved in a quality system aiming at "Zero Faults" and has been **ISO 9001 and ISO 14001 certified.**

- 40% of the staff is dedicated to Research & Development
- Tailored applications for successful projects
- Help desk to support you
- 2 year warranty on all products



2VOICE001GB - Printed on paper from sustainable and certified forests.

2-SMART PANEL



SMART AND INTUITIVE DESIGN



ACCESS CONTROL SPECIALIST



FDI MATELEC
Route de Saint Symphorien
85130 LES LANDES GENUSSON
France
Tel : +33 2 51 61 69 69



sales@fdimatelec.com
www.fdimatelec.com



ONLINE MANAGEMENT

Full integration in one system





2-SMART PANELS



SPECIFICATIONS

- Information on the display
- Vocal synthesis
- Optimized installation and maintenance
- Magnetic loop
- Easy firmware upgrade
- Capacity 4 000 apartments
- Embedded box on hinges and vertical adjustment
- Depth of installation 60 mm
- IK08 and IP54

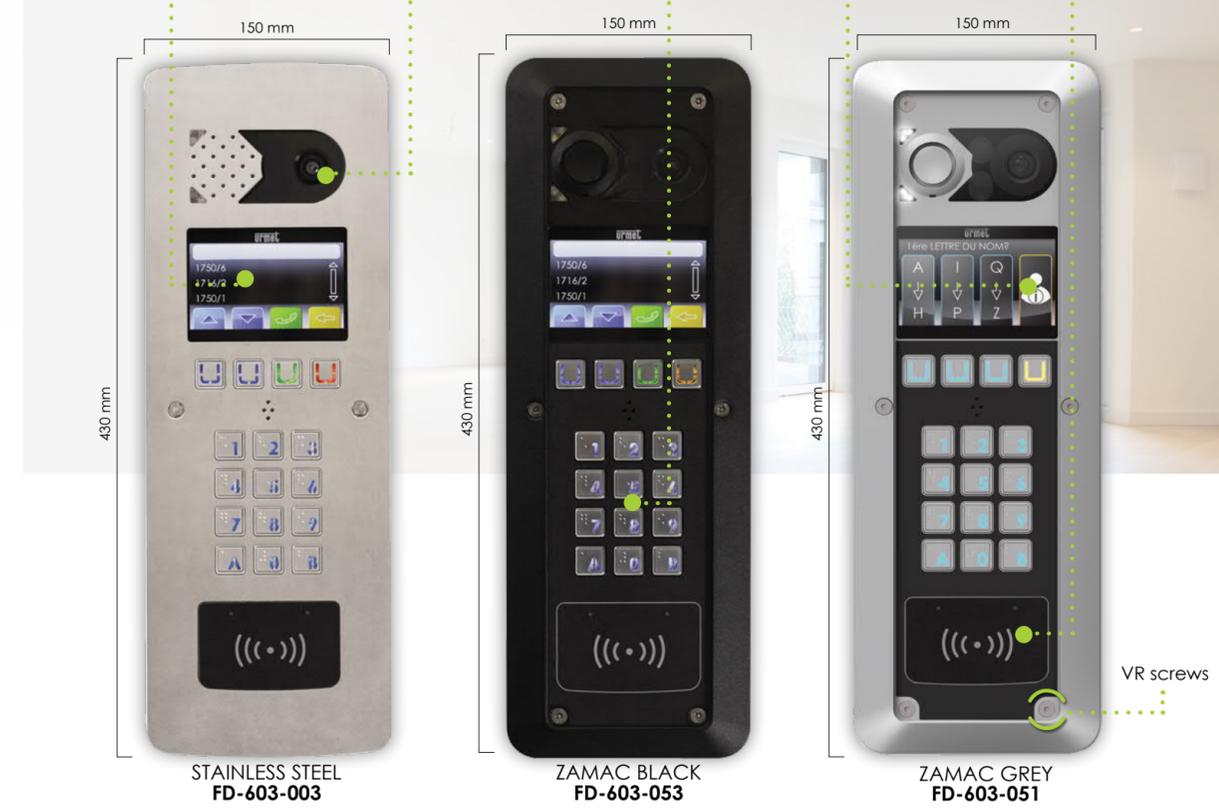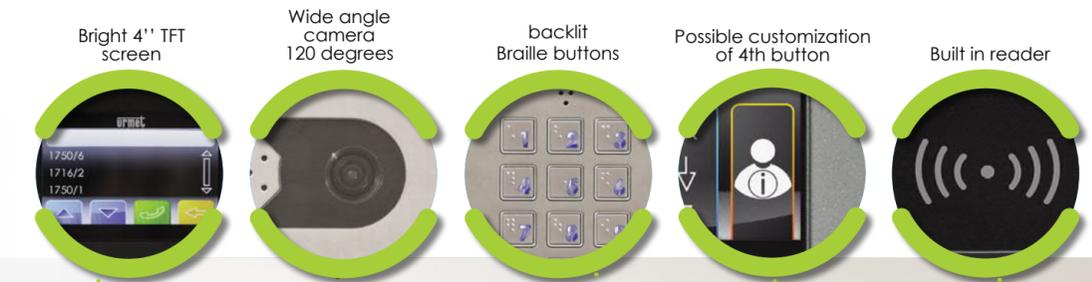

- Security (no built in relay)
- Event logging
- Display management (name programming)
- Direct call on 4th button
- Management of alphanumeric call codes
- Management of communication time
- Built in loop